


X-250

Dust Collector System

Specification

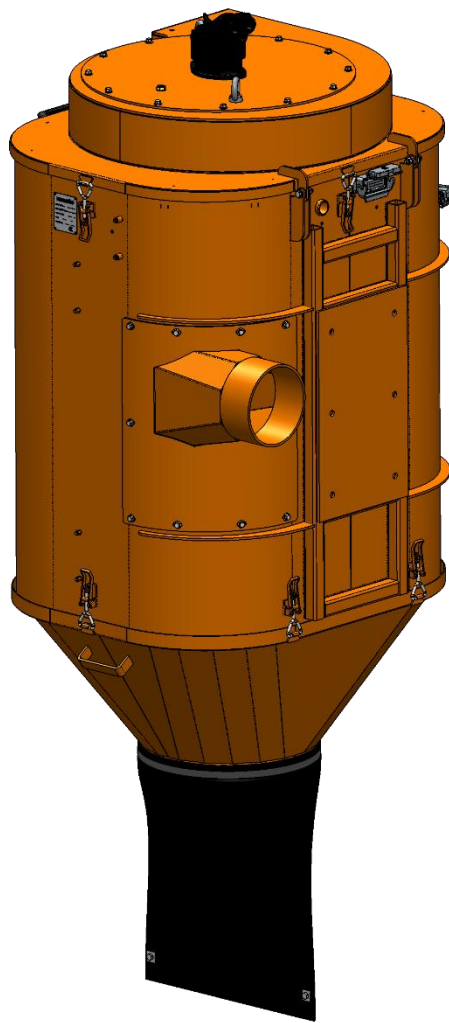

State of the art heavy duty dust collector system improves productivity, improves economy and improves working conditions in the rock drilling industry.



X-250

Dust Collector System

The ILMEG X-250 hydraulic dust collector is used in rock drilling applications for improved productivity and improved working conditions with regards to dust. A typical application is for blast hole drilling with top hammer rock drills or down the hole rock drills.

The filter cleansing function is carried out with reversed air.

ILMEG dust collectors are continuously improved and built of high quality components to ensure long, safe and economical operation.

Specification:

Max hole size:	220 mm (8 5/8")
Filter area:	32 m ²
Number of filters:	4
Oil flow requirement:	80 l/min
Oil pressure requirement:	220 bar
Width x depth x height:	1108 x 1034 x 2040
Approx weight:	450 kg
Filter cleansing	i-clean: Reversed air through filters in sequences while drilling.
Compressed air requirement:	7 Bar (100PSI), 1" hose

Optional Equipment:

Pre-separator

Pickup hood

X-250 main features:

Superior Capacity

The suction capacity, created by the unique design of the suction fan, is sufficient for any drilling application. The new filter cleaning system, superior to existing methods, paves the way for long trouble-free operation.

Improved Efficiency

Clean filters combined with a suction fan with high efficiency means reduced power consumption compared to existing dust collectors.

Reliable

The new filter design in combination with high quality components result in high reliability of the system.

Compact and Robust

The X-250 is specially designed for the extreme demand on mobile drilling equipment in the construction and mining industry.